

2SA733

PNP Silicon Epitaxial Planar Transistor

for switching and AF amplifier applications.

The transistor is subdivided into five groups, R, O, Y, P and L, according to its DC current gain. As complementary type the NPN transistor 2SC945 is recommended.

On special request, these transistors can be manufactured in different pin configurations.




1. Emitter 2. Collector 3. Base
TO-92 Plastic Package

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	60	V
Collector Emitter Voltage	$-V_{CEO}$	50	V
Emitter Base Voltage	$-V_{EBO}$	5	V
Collector Current	$-I_C$	150	mA
Power Dissipation	P_{tot}	250	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $-V_{CE} = 6\text{ V}$, $-I_C = 1\text{ mA}$ Current Gain Group	R	h_{FE}	40	-	80	-
	O	h_{FE}	70	-	140	-
	Y	h_{FE}	120	-	240	-
	P	h_{FE}	200	-	400	-
	L	h_{FE}	350	-	700	-
Collector Base Cutoff Current at $-V_{CB} = 60\text{ V}$	$-I_{CBO}$	-	-	100	nA	
Emitter Base Cutoff Current at $-V_{EB} = 5\text{ V}$	$-I_{EBO}$	-	-	100	nA	
Collector Base Breakdown Voltage at $-I_C = 100\text{ }\mu\text{A}$	$-V_{(BR)CBO}$	60	-	-	V	
Collector Emitter Breakdown Voltage at $-I_C = 10\text{ mA}$	$-V_{(BR)CEO}$	50	-	-	V	
Emitter Base Breakdown Voltage at $-I_E = 10\text{ }\mu\text{A}$	$-V_{(BR)EBO}$	5	-	-	V	
Collector Emitter Saturation Voltage at $-I_C = 100\text{ mA}$, $-I_B = 10\text{ mA}$	$-V_{CE(sat)}$	-	-	0.3	V	
Base Emitter On Voltage at $-V_{CE} = 6\text{ V}$, $-I_C = 1\text{ mA}$	$-V_{BE(on)}$	0.5	-	0.8	V	
Gain Bandwidth Product at $-V_{CE} = 6\text{ V}$, $-I_C = 10\text{ mA}$	f_T	50	-	-	MHz	
Collector Output Capacitance at $-V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	2.8	-	pF	



SEMTECH ELECTRONICS LTD.



ISO/TS 16949 : 2009
Certificate No. 180713000




ISO14001 : 2004
Certificate No. 7116










ISO 9001 : 2008
Certificate No. 50713410



BS-OHSAS 18001 : 2007
Certificate No. 7116




IECQ QC 080000
Certificate No. PRC:RSPM-1483

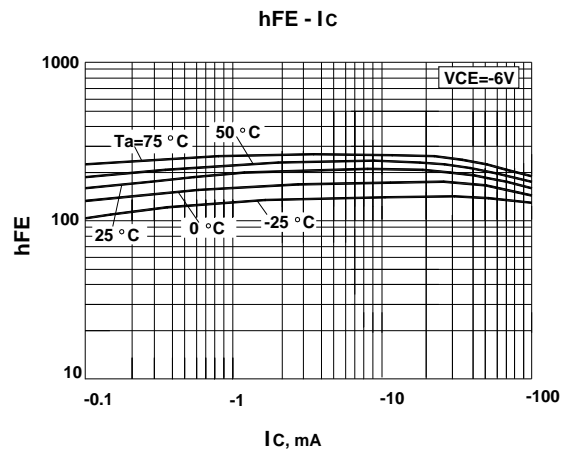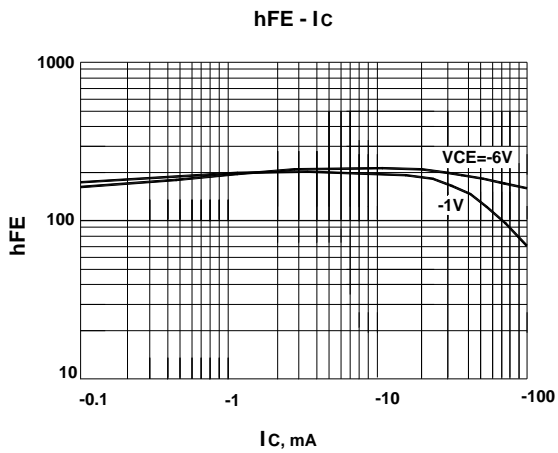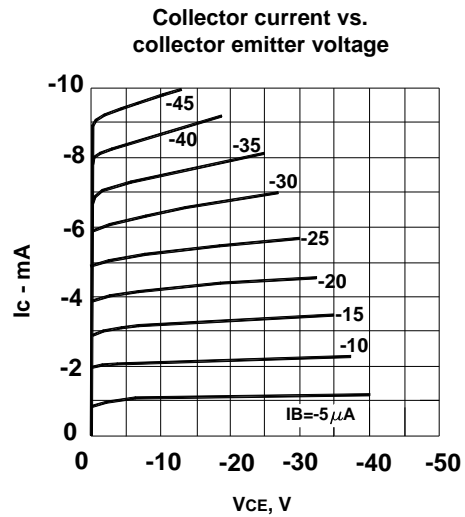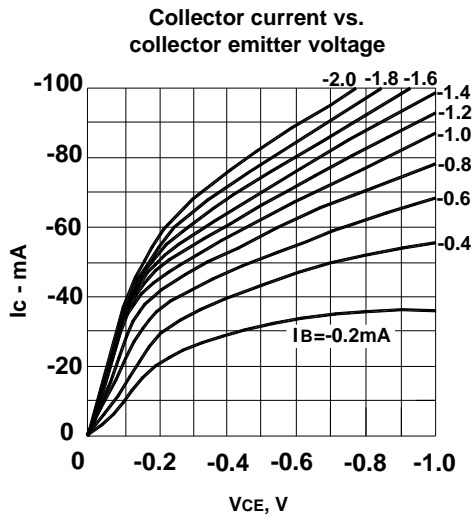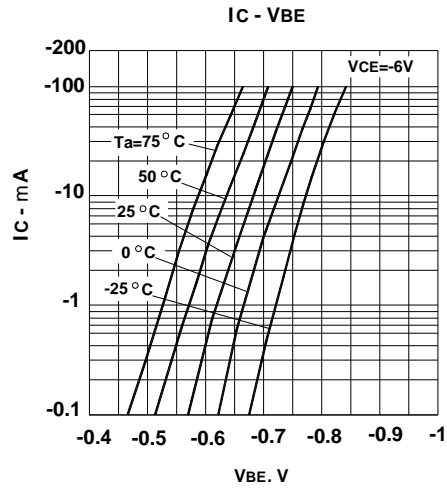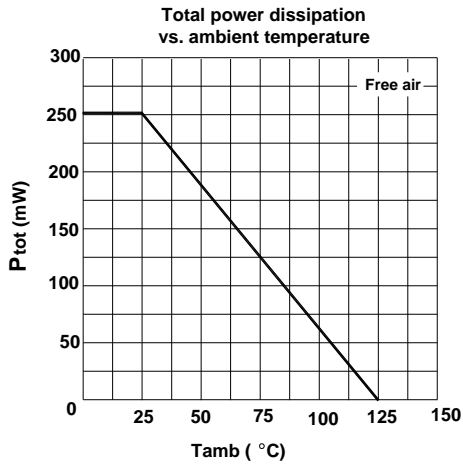


SEMTECH ELECTRONICS LTD.




VCE(sat), VBE(sat) - Ic

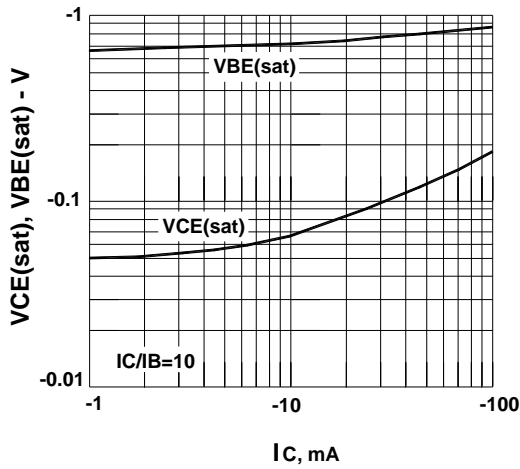


fT - IE

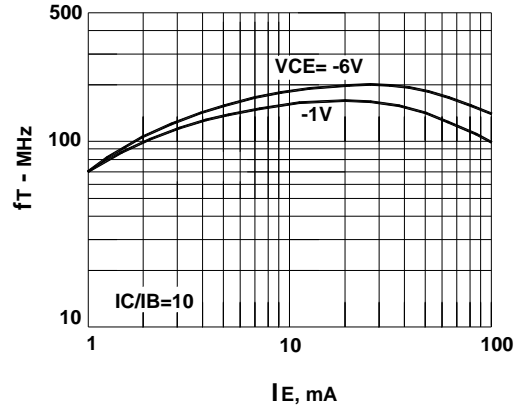



Normalized h-parameters vs. collector emitter voltage

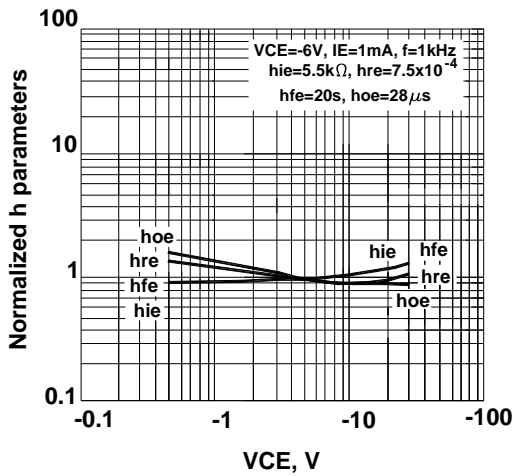

Normalized h-parameters vs. emitter current

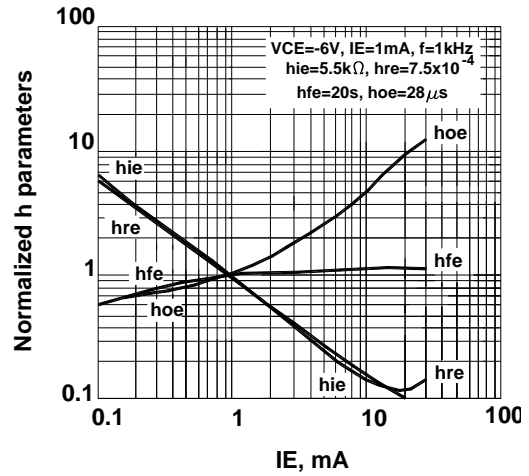

Cob - VCB

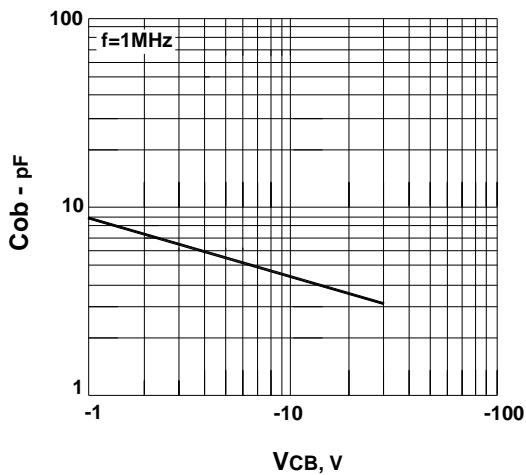

SEMTECH ELECTRONICS LTD.

