


5K $\Phi 5.2 \times 20$ RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V

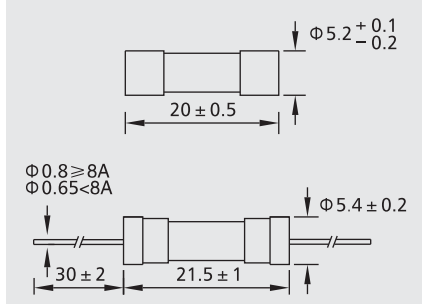


测试标准:
Testing Standard:
 IEC60127-1 IEC60127-2 GB9364.1 GB9364.2

额定分断能力:
Interrupting Rating:
 35A or 10In Whichever is greater

工作温度:
Operating Temperature:
 -55°C ~ +125°C

材料:
Materials:
 End cap: nickel plated brass
 Glass tube: glass
 Lead wire: tinned copper wire
 Inner cap: nickel plated brass

焊接方法:
Soldering Method:
 Wave soldering: 260°C, 10s max
 Manual soldering: 350°C, 5s max

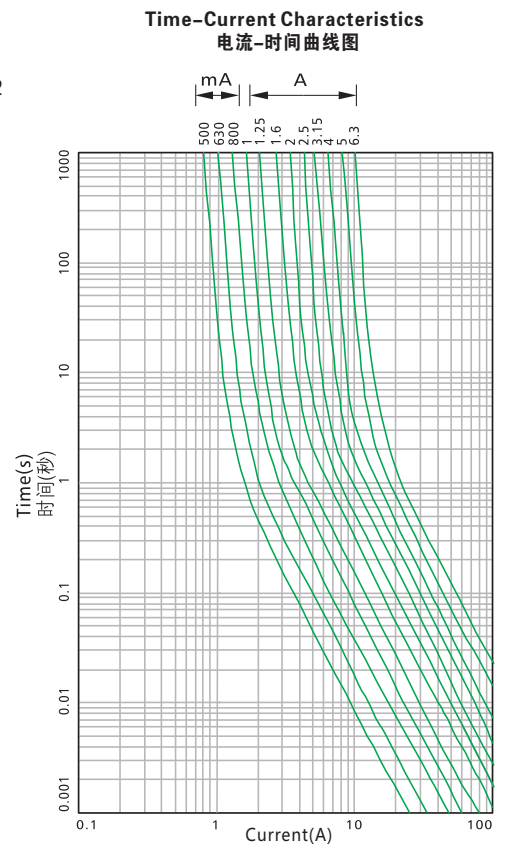

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time (200mA~10A)	熔断时间 Opening Time (12.5A~16A)
210%	2 min Max(小于2分钟)	5 min Max(小于5分钟)
275%	600 ms~10 s	600 ms~15 s
400%	150 ms~3 s	150 ms~5 s
1000%	20 ms~300 ms	20 ms~400 ms

目录编号: Catalog No.A:250V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals							
					UL US	DVE	CCC S	CEC	PS E JET	KC	S	
5K0200A	200mA	250V	1500	0.10	●							
5K0250A	250mA	250V	1300	0.18	●							
5K0315A	315mA	250V	1100	0.30	●	●	●			●	●	
5K0400A	400mA	250V	1000	0.65	●							
5K0500A	500mA	250V	900	0.96	●	●	●			●	●	
5K0630A	630mA	250V	300	1.7	●	●	●			●	●	
5K0800A	800mA	250V	250	3.2	●	●	●			●	●	
5K1100A	1A	250V	150	3.8	●	●	●			●	●	
5K1125A	1.25A	250V	150	4.3	●	●	●		●	●	●	
5K1160A	1.6A	250V	150	5.0	●	●	●		●	●	●	
5K1200A	2A	250V	150	12.8	●	●	●		●	●	●	
5K1250A	2.5A	250V	100	20.7	●	●	●		●	●	●	
5K1315A	3.15A	250V	100	45	●	●	●		●	●	●	
5K1400A	4A	250V	100	61.4	●	●	●		●	●	●	
5K1500A	5A	250V	100	135	●	●	●		●	●	●	
5K1630A	6.3A	250V	100	205	●	●	●		●	●	●	
5K1800A	8A	250V	100	320	●	●	●		●	●	●	
5K2100A	10A	250V	100	510	●	●		●	●	●	●	
5K2125A	12.5A	250V	80	800	●			●	●	●	●	
5K2160A	16A	250V	80	1105	●			●	●	●	●	