



P.C.B LAYOUT(Copper-side view)

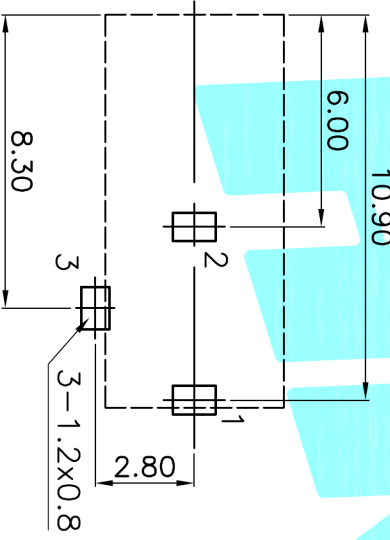

Model No.	1	2	3	4
PIN	$\phi 0.65$	$\phi 1.0$	$\phi 1.3$	$\phi 1.65$
DC PLUG O.D.	$\phi 2.35$	$\phi 3.5$	$\phi 3.5$	$\phi 4.0$

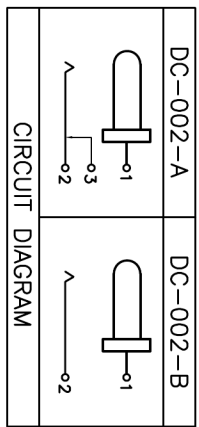

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3~20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	3	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
	APPROVALS	DATE				
DRAWN	J.X.Zhang	2013/11/11				
CHECKED						
APPROVALS						
TOLERANCES ARE			30~ ϕ ±0.1	±0.30	ANGLE	
			10~30	±0.20	UNIT: mm	SCALE: 1:1
			5~10	±0.15	DRAWING NO.	PROJ.
			~5	±0.10		SHEET 1 OF 1

TITLE: PHONE JACKES	
ELECTRONICS CO.,LTD	
DC-002	