



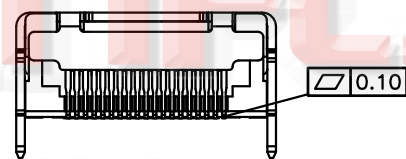


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 18/07/05		LJC 18/07/05
B	ADD PACKING TYPE	JLZ 06/02/15'		



NOTES:



- MATERIALS
  - Insulator: thermoplastic, UL 94V-0 Rated
  - Contacts: Copper Alloy
  - Shell: Copper Alloy
- SPECIFICATION
  - Contact resistance: 50mΩ max.
  - Insulation resistance: 100MΩ min.
  - Dielectric withstanding voltage: 100 VAC 1 minute.
  - Temperature range: -40°C to +105°C.

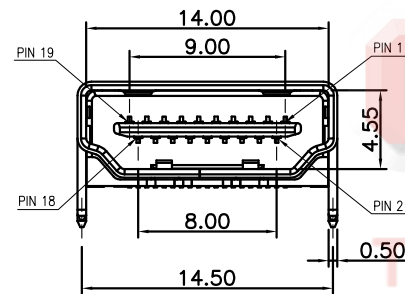

3. PRODUCT NUMBER CODE:

DS1114 - X X X X X

- Packing type
  - R: Tape on reel
  - B: Tube
  - T: Tray **Ⓟ**
- MYLAR SUPPORT
  - S: W/ mylar
  - X: W/O mylar
- Contact plating
  - 0: selective gold flash
  - C: selective 3u" gold
  - 1: selective 10u" gold
  - 3: selective 30u" gold
- Shell plating
  - 6: Tin
  - N: Nickel
- Color of housing
  - B: Black

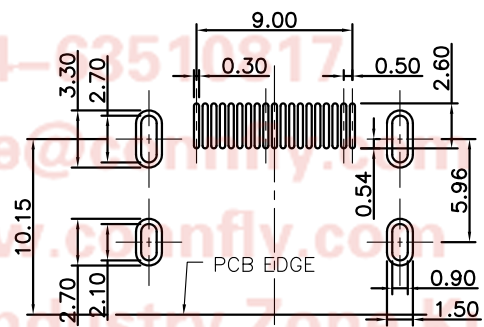

RECOMMEND P.C.B LAYORT  
(Tolerance ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	HDMI 19PIN Female SMT WITHOUT FLANGE
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1114
.XX	±0.25	.XX	±2°	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1114-XXXXX-B					

Tel: 86-574-63508787  
 Fax: 86-574-63510817  
 E-mail: sale@connfly.com  
 http://www.connfly.com  
 Add: East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C: 315333