



Typical Specifications :  
 1. Rating : DC 12V 50mA  
 2. Life:100,000 Cycles Min.

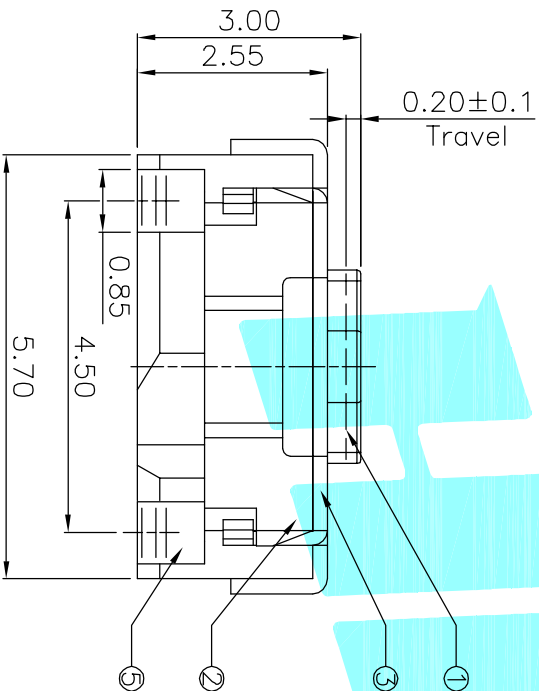

PCB Layout(Pattern side)

NO.1	
PART NO	VIGOR
3	180±.30
4	250±.30

NO.2-NO.3	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Dust cover	—	1	KAPTON FILM	—	—
⑤	Terminal	—	2	Phosphor Bronze Plating silver	—	—
④	Contact	—	1	F.Ag/SUS	—	—
③	Base	—	1	LCP	Black	—
②	Cover	—	1	SUS	—	—
①	Keystroke	—	1	Nylon	WHITE	—

APPROVALS		DATE
DRAWN	J.X.Zhang	2013/6/24



ELECTRONICS CO.,LTD

CHECKED		TITLE:
APPROVALS		TACT SWITCHS

APPROVALS		PART NO.
TOLERANCES ARE	30~0.15 ± 10~.30 ±0.20 5~.10 ±0.15 ~ 5 ±0.10	K2-1826FM-F□SW-□□

APPROVALS		ANGLE	UNIT:	SCALE:	PROJ:
±2°	±2°	mm	1:1	1	1

APPROVALS		DRAWING NO.	SHEET
NEW	DESCRIPTION.		1 OF 1

ECN NO.	REV.	DATE.	CHANGE.	CHECK.	APPRO.
	A				