
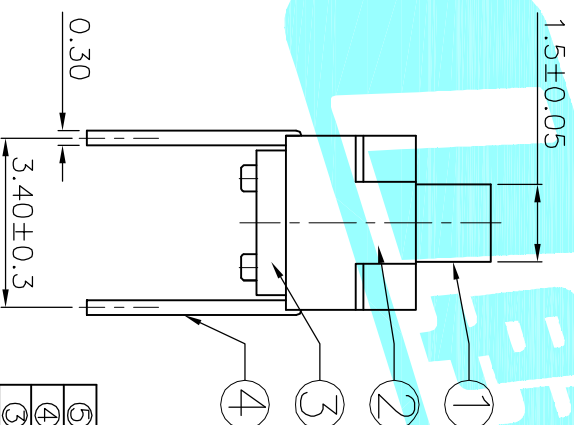


PCB Layout(Pattern side)

Circuit Diagram

Typical Specifications :

1. Rating : DC 6V 0.3A
2. Life:10,000 Cycles Min.

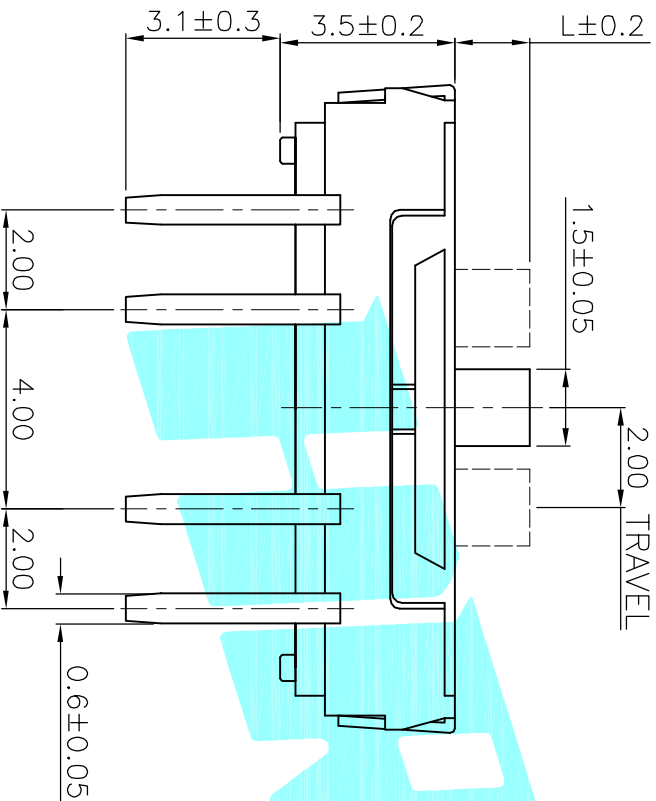

PART NO.	L	Operating force
K3-2336D-F1	2	250±100gf
K3-2336D-K1	3	
K3-2336D-L1	4	

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Contact Spring	—	2	Beryllium copper	Ag Plated	—
④	Terminal	—	8	Brass Strip	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	SUS	Natural	—
①	KNOB	—	1	NYLON	White	—

APPROVALS		DATE
DRAWN	J.X.Zhang	2013/9/26



TITLE: TOGGLE SWITCHES

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—

APPROVALS		PART NO.	SCALE:	PROJ.
CHECKED	—	—	1:1	—
TOLERANCES ARE	30~125μ ±0.30	ANGLE	—	—
	10~30 ±0.20	UNIT: mm	—	—
	5~10 ±0.15	DRAWING NO.	—	—
	~5 ±0.10	SHEET	—	1 OF 1