

## Features

- Ideal for DECT Applications
- Saturated Output Power: +26 dBm Typical
- Power Gain: 26 dB Typical
- Low Current: 400 mA at  $P_{SAT}$
- Ramp Power Control
- Micro-Amp Shutdown
- Operates from 1.5 V to 4.0 V
- $V_{EN}$  configurable for either 1.7 V or 2.5 V
- Lead-Free 3 mm 12-Lead PQFN Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- RoHS\* Compliant 260°C Reflow Compatible

## Description

The MAAPSS0071 is a three stage power amplifier designed for Cordless Telephone applications. This power amplifier is mounted in a standard outline, lead-free 3 mm 12-lead PQFN plastic package. The MAAPSS0071 features an integrated power enable control pin.

## Ordering Information<sup>1</sup>

Part Number	Package
MAAPSS0071	Bulk Packaging
MAAPSS0071TR-3000	3000 piece reel
MAAPSS0071SMB	Sample Test Board (Includes 5 Samples)

1. Reference Application Note M513 for reel size information.


## Absolute Maximum Ratings<sup>2,3</sup>

Parameter	Absolute Maximum
Input Power	+ 5 dBm
Operating Supply Voltage	+4.0 Volts
Operating Control Voltage	+3.0 Volts
Operating Temperature	-20°C to +85°C
Channel Temperature	+150°C
Storage Temperature	-40°C to +150°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Functional Schematic

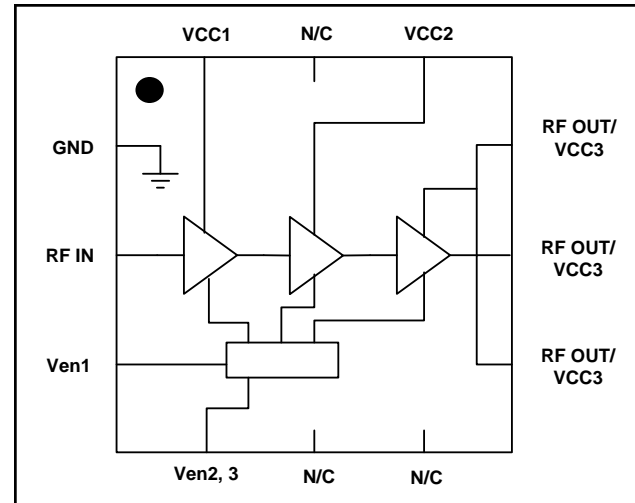

## Pin Configuration

Pin No.	Pin Name	Description
1	GND	Ground
2	RF <sub>IN</sub>	RF Input
3	$V_{EN1}$	Power Enable
4	$V_{EN2,3}$	Power Enable
5	N/C	No Connection
6	N/C	No Connection
7	RF <sub>OUT</sub> / $V_{CC3}$	RF Output, 3rd Stage Supply
8	RF <sub>OUT</sub> / $V_{CC3}$	RF Output, 3rd Stage Supply
9	RF <sub>OUT</sub> / $V_{CC3}$	RF Output, 3rd Stage Supply
10	$V_{CC2}$	2nd Stage Supply
11	N/C	No Connection
12	$V_{CC1}$	1st Stage Supply
Pad <sup>4</sup>	GND	RF & DC Ground

- The exposed pad centered on the package bottom must be connected to RF and DC ground.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298  
 Visit [www.macontech.com](http://www.macontech.com) for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## Electrical Specifications:

Frequency = 1905 MHz,  $P_{IN} = -2$  to  $2$  dBm,  $V_{CC} = 2.4$  V,  $V_{EN} = 2.5$  V,  $T_A = 25$  °C,  $Z_0 = 50\Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max
Input Return Loss	—	dB	—	15	—
Output Power	—	dBm	24	26	27
Power Flatness	$2.0 < V_{CC} < 3.0$ V	dB	—	3	—
PAE	—	%	—	45	—
Current	—	mA	—	400	500
Current, Off	$V_{EN} = 0$ V	$\mu$ A	—	3	10
Pdiss	$P_{OUT} = 26.0$ dBm	W	—	0.5	—
Control Pins	$V_{EN}$ , Low	V	0	—	0.5
	$V_{EN}$ , High	V	2.0	—	2.5
	Current	mA	—	2.0	4.0
Harmonics	2f	dBc	—	-35	—
	3f	dBc	—	-40	—
Forward Isolation	$V_{EN} = 0$ V	dB	—	39	—
Duty Cycle	—	%	—	—	100
Turn on/off time	Ton: RF burst to NTP-1	$\mu$ S	—	3	—
	Toff: NTP-1 to off	$\mu$ S	—	2	—
Stability	$+1.5V < V_{CC} < +3.5$ V, $P_{IN} = -2$ to $2$ dBm, $VSWR < 6:1$ $-20^\circ\text{C} < T_C < +70^\circ\text{C}$ , RBW = 3 MHz max hold		All spurs < -60 dBc		

## Lead-Free 3 mm 12-Lead PQFN†

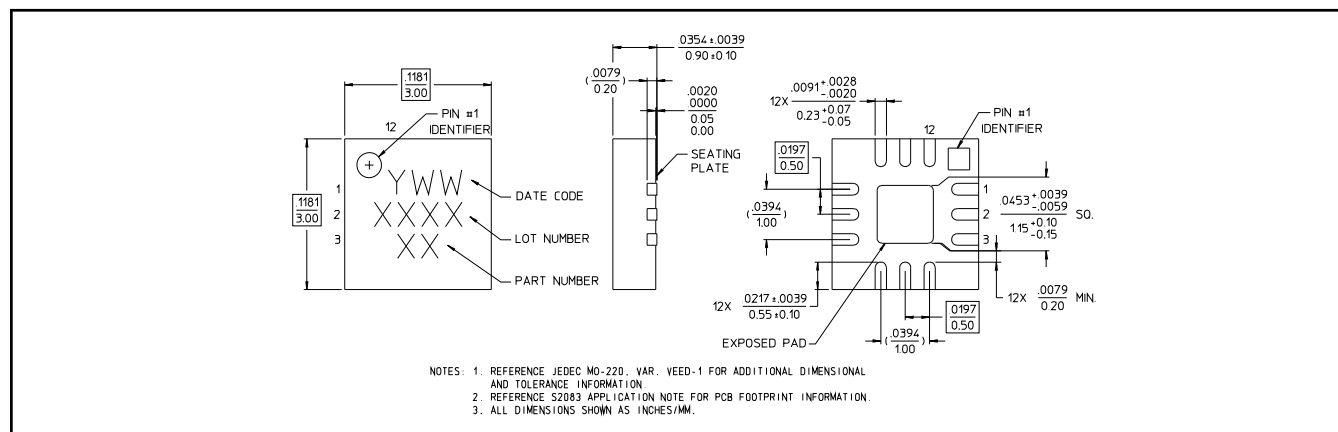


† Reference Application Note M538 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.

## Operating the MAAPSS0071

The MAAPSS0071 can be damaged by electrostatic discharge (ESD). Use proper ESD control techniques when handling this device. To operate the MAAPSS0071, turn on the  $V_{CC}$  before  $V_{EN}$  for power on and turn off  $V_{CC}$  after  $V_{EN}$  for shutdown.

## Evaluation Board Schematic

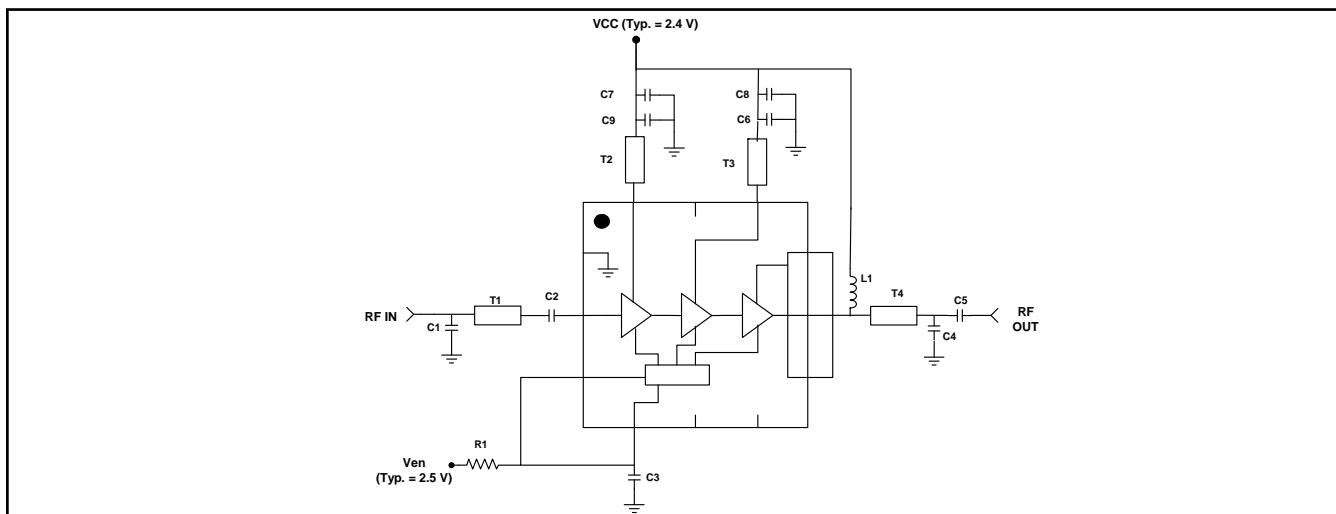


## MAAPSS0071 External Parts List

Designator	Value	Footprint	Manufacturer	Part ID
C1	1 pF	0402	Murata	GRM1555C1H1R0CZ01B
C2, C4	3 pF	0402	Murata	GRM1555C1H3R0CZ01B
C3	22 nF	0402	Murata	GRM155R71C223KA01B
C5, C6	47 pF	0402	Murata	GRM1555C1H470JZ01B
C7, C8	100 nF	0402	Murata	GRM155F51C104ZA01B
C9	4 pF	0402	Murata	GRM155C1H4R0CZ01B
R1 (V <sub>EN</sub> = 2.5 V)	470 Ohm	0402	KOA	RK73B1ET470J
R1 (V <sub>EN</sub> = 1.7 V)	100 Ohm	0402	KOA	RK73B1ET101J
L1	10 nH	0402	Coilcraft	0402CS-10NXJB

## Transmission Line Dimensions, 0.20 mm FR4


Designator	Length (mm) <sup>5</sup>	Width (mm)
T1 <sup>6</sup>	2.16	0.37
T2	2.54	0.37
T3	3.05	0.37
T4	3.94	0.37

5. From package edge to center of component.  
6. T1 is measured from package edge (not C2) to the center of C1.

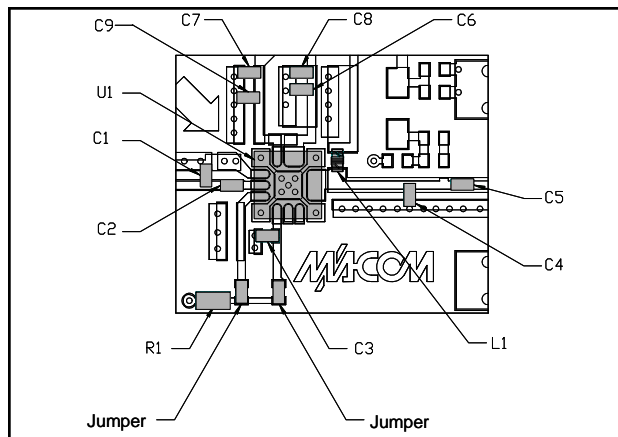


## Typical Characteristics, $V_{EN} = 2.5\text{ V}$ (Using the supplied sample board BOM)


$P_{OUT}$ , PAE,  $I_{CC}$  vs.  $P_{IN}$  @ 2.4 V, 1900 MHz

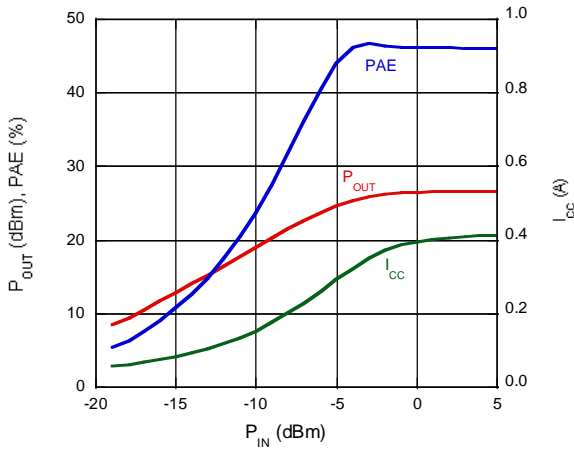


$P_{OUT}$ , PAE,  $I_{CC}$  vs.  $V_{CC}$  @ 1900 MHz,  $P_{IN} = 0\text{ dBm}$

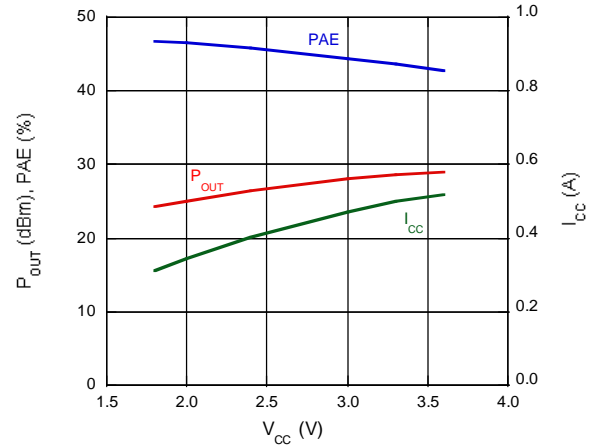


$P_{OUT}$  vs. Temperature @ 1900 MHz,  $P_{IN} = 0\text{ dBm}$

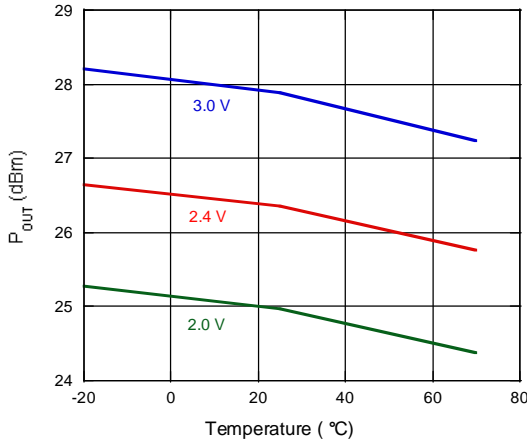


$I_{CC}$  vs. Temperature @ 1900 MHz,  $P_{IN} = 0\text{ dBm}$

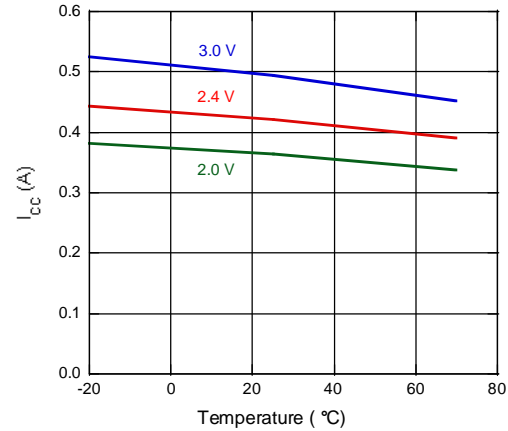

$P_{OUT}$  vs.  $V_{CC}$  @ 1900 MHz,  $P_{IN} = 0\text{ dBm}$

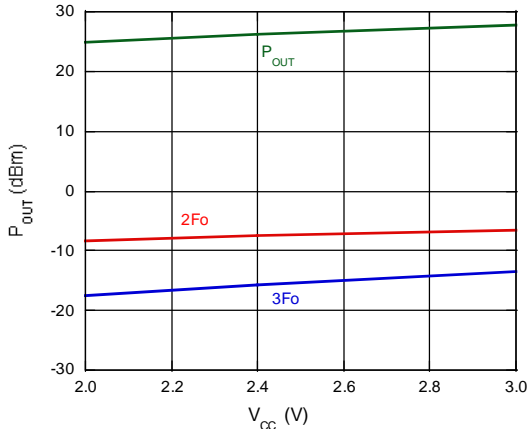

$P_{OUT}$ , PAE,  $I_{CC}$  vs. Frequency @  $V_{CC} = 2.4\text{ V}$ ,  $P_{IN} = 0\text{ dBm}$

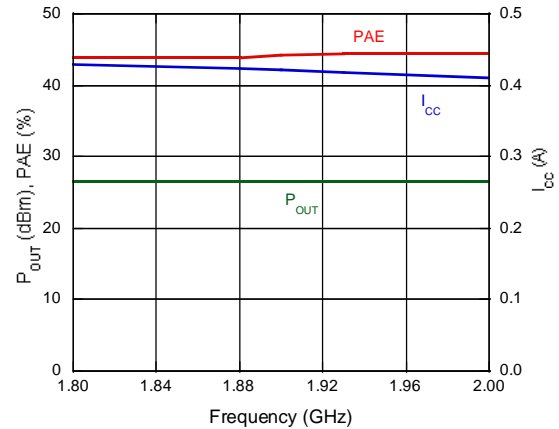

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macontech.com](http://www.macontech.com) for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## Typical Characteristics (All data uses the supplied sample board BOM)

$S_{21}$  vs. Frequency @  $V_{CC} = 2.4\text{ V}$ ,  $V_{EN} = 2.5\text{ V}$

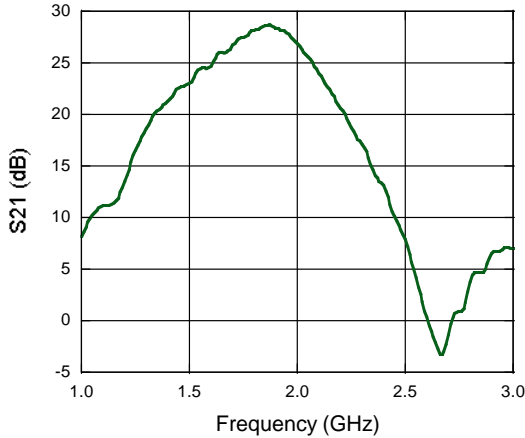


$S_{22}$ ,  $S_{11}$  vs. Frequency @  $V_{CC} = 2.4\text{ V}$ ,  $V_{EN} = 2.5\text{ V}$

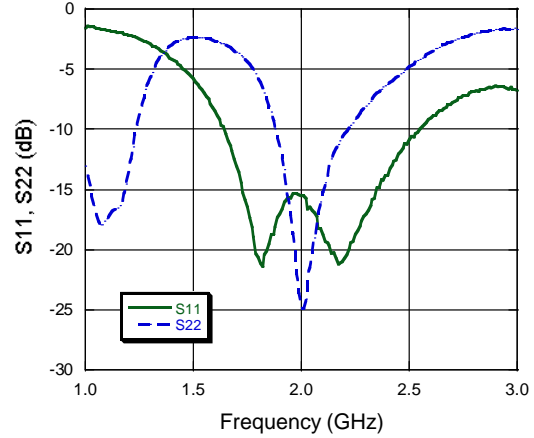


## Typical Characteristics, $V_{EN} = 1.7\text{ V}$ (All data uses the supplied sample board BOM)


$P_{OUT}$ , PAE,  $I_{CC}$  vs.  $P_{IN}$  @ 2.4 V, 1900 MHz

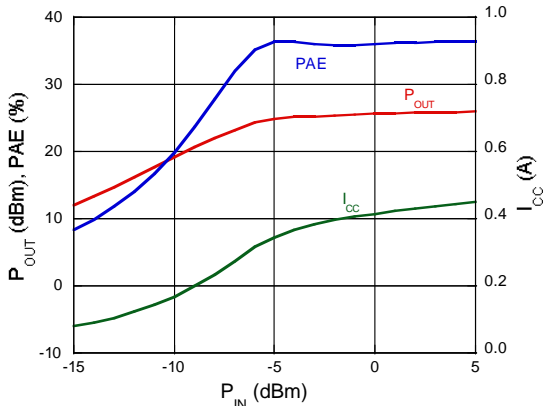


$P_{OUT}$ , PAE,  $I_{CC}$  vs.  $V_{CC}$  @ 1900 MHz,  $P_{IN} = 0\text{ dBm}$

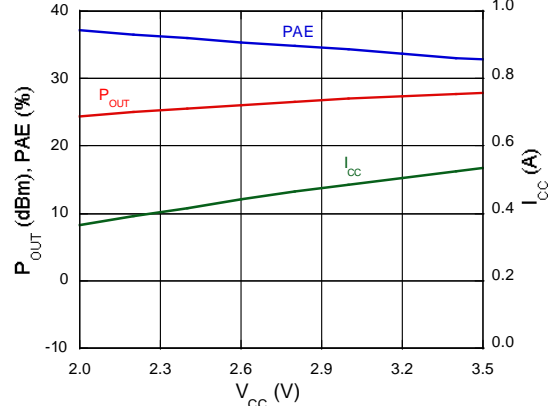

$P_{OUT}$ , PAE,  $I_{CC}$  vs. Freq. @ 1900 MHz,  $P_{IN} = 0\text{ dBm}$

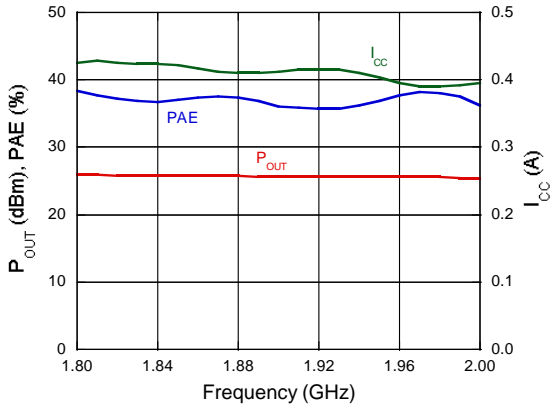

$P_{OUT}$  vs.  $V_{EN}$  @ 2.4 V, 1900 MHz,  $P_{IN} = 0\text{ dBm}$

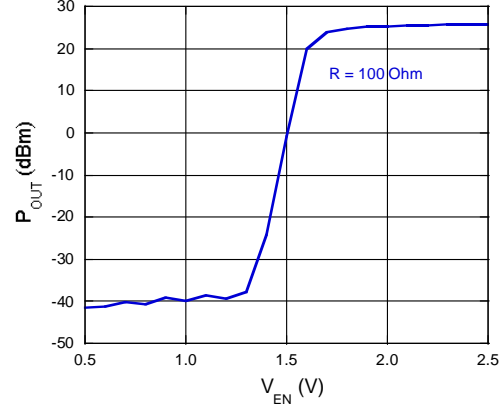

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macontech.com](http://www.macontech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.