


P.C.B LAYOUT(copper—sided view)

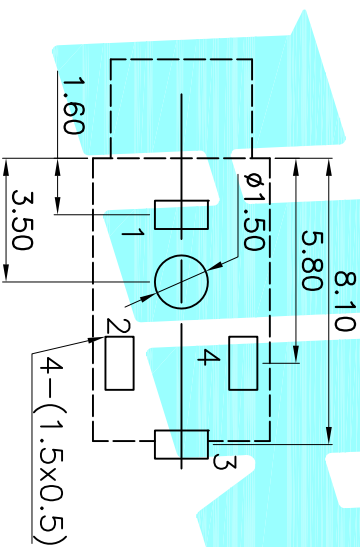

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:−20℃~70℃  
 Operating force:3–20N  
 Operating Life:5,000cycles

Model NO	A=φ4	PJ-2100B-A	PJ-2100B-B
	A=φ5	PJ-2100C-A	PJ-2100C-B
Schematic			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
<p>DRAWN J.X.Zhang 2013/11/11</p> <p>CHECKED</p> <p>APPROVALS</p> <p>TOLERANCES ARE 30~φL ±0.30 ANGLE 10~30 ±0.20 5~10 ±0.15 ±2°</p> <p>PHOSPHOR BRONZE Au Plating</p> <p>NYLON Black</p> <p>PHONE JACKES</p> <p>PJ-2100B</p> <p>SCALE: 1:1</p> <p>PROJ. SHEET 1 OF 1</p>						