


P.C.B LAYOUT(copper-sided view)

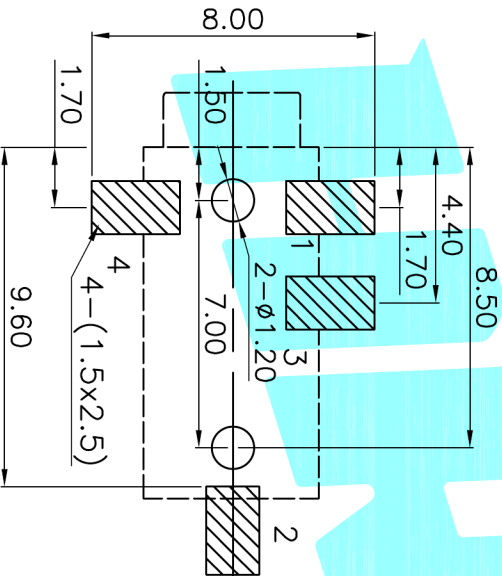

Rating:0.5A 30V DC  
 Contact Resistance:100 m $\Omega$  Max.  
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C  
 Operating force:3-20N  
 Operating Life:5,000cycles

Model No.	PJ-226-A	PJ-226-B
Schematic		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	4	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11				
CHECKED						
APPROVALS						
TOLERANCES ARE	30 $\pm$ BLT	$\pm 0.30$	ANGLE	PART NO.	PJ-226	
	10 $\sim$ 30	$\pm 0.20$			TITLE: PHONE JACKES	
	5 $\sim$ 10	$\pm 0.15$	$\pm 2^{\circ}$		SCALE: 1:1	PROJ.
	$\sim 5$	$\pm 0.10$			DRAWING NO.	SHEET 1 OF 1

ELECTRONICS CO.,LTD

