


P.C.B LAYOUT(copper-sided view)
9.60

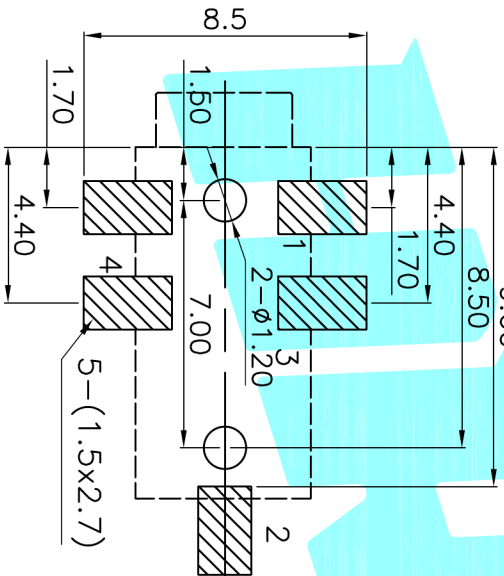

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model No.	PJ-227-A	PJ-227-B
Schematic		
Model No.	PJ-227-C	PJ-227-D
Schematic		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	5	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11				
CHECKED						
APPROVALS		TITLE:	PHONE JACKES			
APPROVALS		PART NO.	PJ-227			
TOLERANCES ARE		30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~0.20	±0.20			PROJ.
		5~0.10	±0.15	±2'	DRAWING NO.	SHEET 1 OF 1

HYRO
 ELECTRONICS CO.,LTD