



P.C.B Layout (copper-sided view)

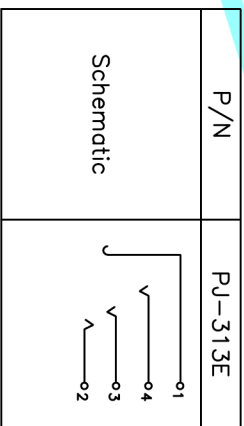

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

② Terminal	8	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN		J.X.Zhong		2013/11/11		
CHECKED				TITLE: PHONE JACKES		
APPROVALS				PART NO. PJ-313E		
TOLERANCES ARE		30~0.11	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROD-
		5~10	±0.15	±2°		SHEET 1 OF 1
		~5	±0.10			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

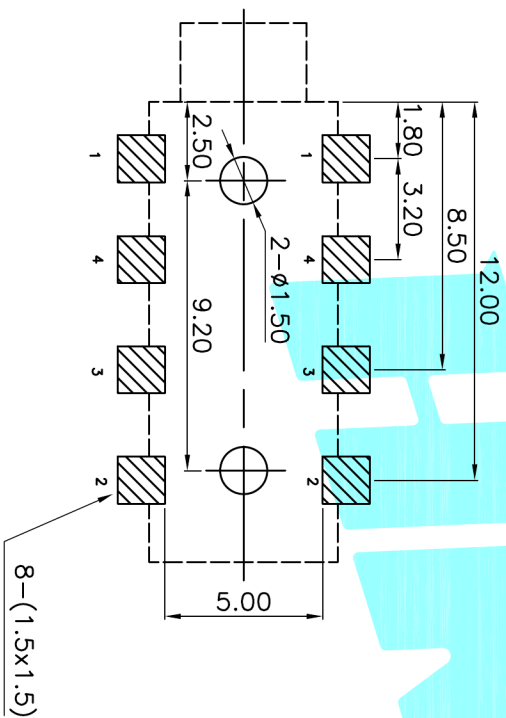