


Rating: 0.5A 30V DC
 Contact Resistance: 100 mΩ Max.
 Operating temperature: -20℃~70℃
 Operating force: 3-20N
 Operating Life: 5,000cycles

Model No.	PJ-3250-A	PJ-3250-B	PJ-3250-C	PJ-3250-D
PJ-3250A-A	PJ-3250A-B	PJ-3250A-C	PJ-3250A-D	
PJ-3250B-A	PJ-3250B-B	PJ-3250B-C	PJ-3250B-D	
PJ-3250C-A	PJ-3250C-B	PJ-3250C-C	PJ-3250C-D	
PJ-3250D-A	PJ-3250D-B	PJ-3250D-C	PJ-3250D-D	
PJ-3250E-A	PJ-3250E-B	PJ-3250E-C	PJ-3250E-D	

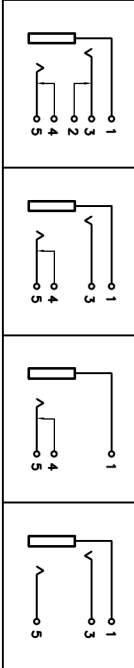

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	5	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11	ELECTRONICS CO.,LTD			
CHECKED			TITLE: PHONE JACKS			
APPROVALS			PART NO.	PJ-3250		
TOLERANCES ARE		30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~0.30	±0.20			PROJ.
		5~0.10	±0.15	±2'	DRAWING NO.	SHEET 1 OF 1