


DESCRIPTION:

SM6S Series TVS diodes can be used in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

FEATURES:

- ✧ Available in uni/bi-directional polarity.
- ✧ Low forward voltage drop & Low leakage current.
- ✧ High surge capability.
- ✧ Junction passivation optimized design passivated anisotropic rectifier technology.
- ✧ $T_J = 175\text{ }^\circ\text{C}$ capability suitable for high reliability and automotive requirement.
- ✧ Meets ISO7637-2 surge specification (varied by test condition).
- ✧ Meets MSL level 1, per J-STD-020, LF maximum peak of $245\text{ }^\circ\text{C}$.
- ✧ AEC-Q101 qualified.
- ✧ Compliant to ROHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

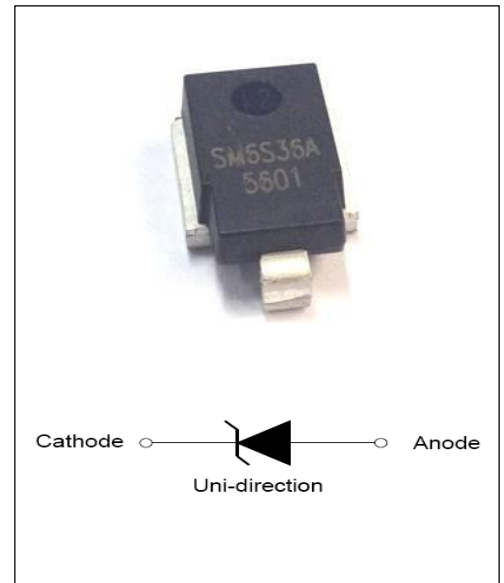

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 10/1000us waveform	P _{pp}	4600	Watts
Peak pulse power dissipation on 10/10000us waveform		3600	Watts
Peak pulse current with 10/1000us waveform	I _{pp}	See next table	Amps
Power dissipation on infinite heat Sink at T _C =25°C	P _D	6.0	Watts
Peak forward surge current, 8.3ms single half sine-wave	I _{FSM}	600	Amps
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150	°C
Typical thermal resistance, junction to case	R _{θJC}	0.95	°C/Watt

ELECTRICAL CHARACTERISTICS

Part Number		V_R	$I_R @ V_R$		$V_{BR} @ I_T$		I_T	$V_C @ I_{pp}$	I_{pp}
Uni-polar	Bi-polar	V	$\mu A @ 25^\circ C$	$\mu A @ 175^\circ C$	min(V)	max (V)	mA	V	A
SM6S10A	--	10.0	5	250	11.1	12.3	5	17.0	271.0
SM6S11A	--	11.0	5	150	12.2	13.5	5	18.2	253.0
SM6S12A	--	12.0	5	150	13.3	14.7	5	19.9	231.0
SM6S13A	--	13.0	5	150	14.4	15.9	5	21.5	214.0
SM6S14A	--	14.0	5	150	15.6	17.2	5	23.2	198.0
SM6S15A	--	15.0	5	150	16.7	18.5	5	24.4	189.0
SM6S16A	--	16.0	5	150	17.8	19.7	5	26.0	177.0
SM6S17A	--	17.0	5	150	18.9	20.9	5	27.6	167.0
SM6S18A	--	18.0	5	150	20.0	22.1	5	29.2	158.0
SM6S20A	--	20.0	5	150	22.2	24.5	5	32.4	142.0
SM6S22A	--	22.0	5	150	24.4	26.9	5	35.5	130.0
SM6S24A	--	24.0	5	150	26.7	29.5	5	38.9	118.0
SM6S26A	--	26.0	5	150	28.9	31.9	5	42.1	109.0
SM6S28A	--	28.0	5	150	31.1	34.4	5	45.4	101.0
SM6S30A	--	30.0	5	150	33.3	36.8	5	48.4	95.0
SM6S33A	--	33.0	5	150	36.7	40.6	5	53.3	86.0
SM6S36A	--	36.0	5	150	40.0	44.2	5	58.1	79.0

Note:

①. For all types maximum $V_F = 1.9$ V at $I_F = 100$ A measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

②. Surge waveform: 10/1000 μ s

V_R : Stand-off Voltage -- Maximum voltage that can be applied V_{BR} :
Breakdown Voltage

V_C : Clamping Voltage -- Peak voltage measured across the suppressor at a specified I_{pp}

I_R : Reverse Leakage Current

I_T : Test current

Mechanical Data


CASE: DO-218AB Molding compound meets UL 94V-0 flammability rating Base

P/NHE3-ROHS-compliant, AEC-Q101 qualified.

Terminals: Matte tin plated leads, solder able per J-STD-002 and JESD 22-B102,

HE3 suffix meets JESD 201 class 2 whisker tests.

ORDERING INFORMATION

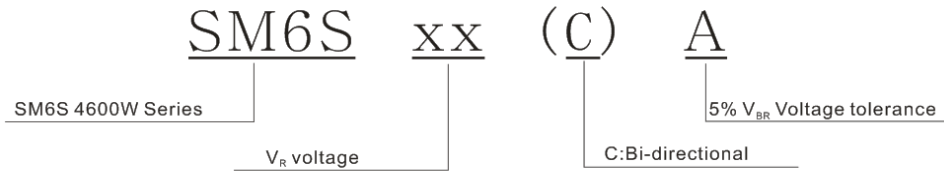

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$, unless otherwise noted)

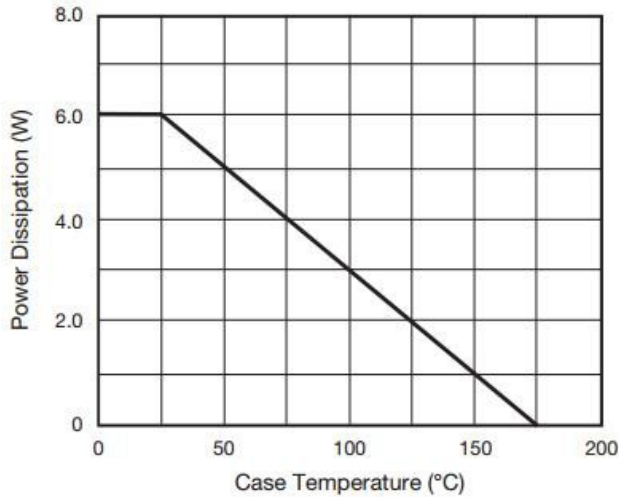


Fig.1 Power Derating Curve

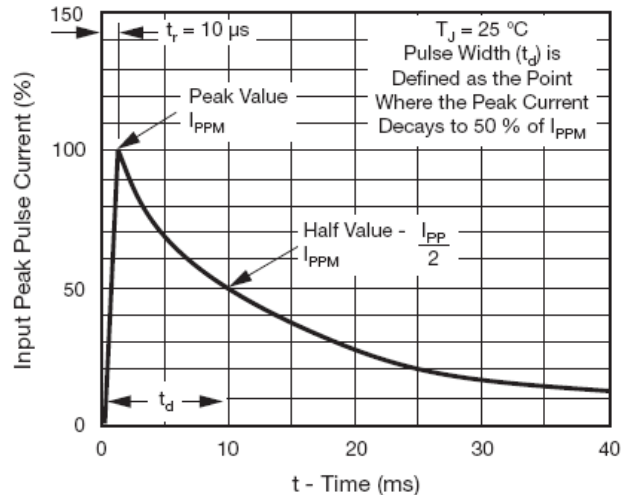


Fig.2 Pulse Waveform

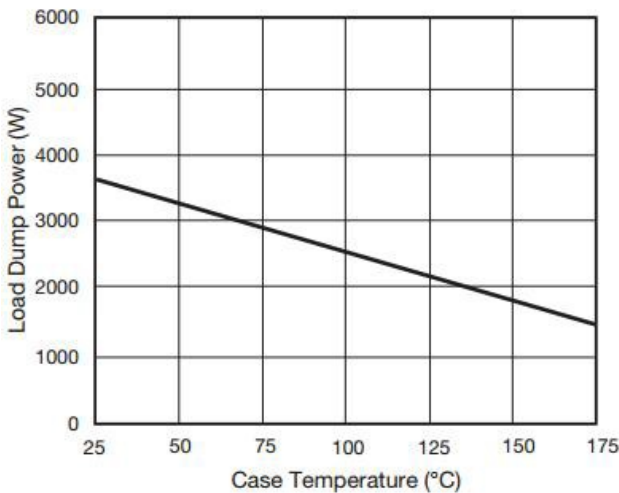


Fig.3 Load Dump Power Characteristics
(10 ms Exponential Waveform)

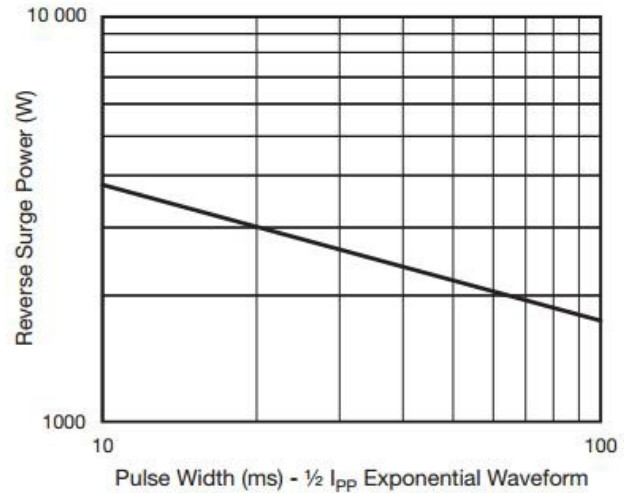


Fig.4 Reverse Power Capability


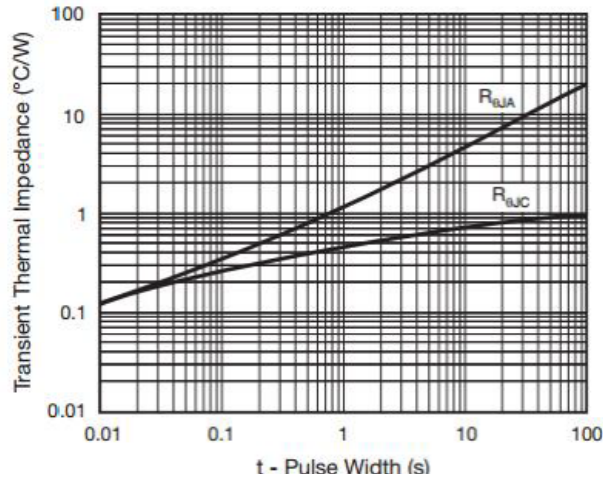


Fig.5 Typical Transient Thermal Impedance

MARKING



SM6S36A: Part Number


5201: "5"--2015 (year)

"2"--2 (month)


"01"-- (lot)

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see FIG.5)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

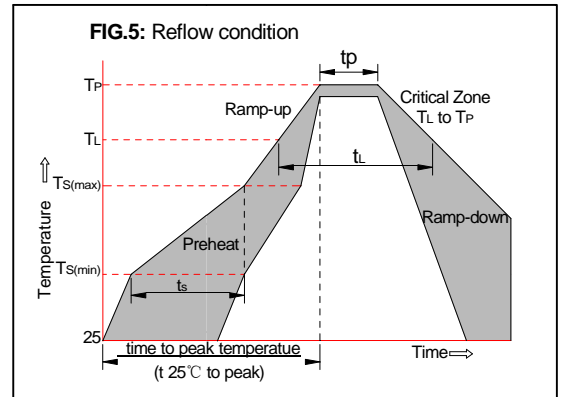

PACKAGE MECHANICAL DATA

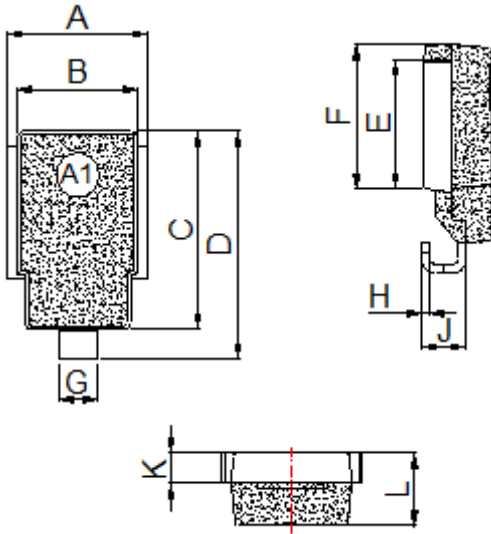

Dimension	Inches		Millimeters	
	Min	Max	Min	Max
A	0.374	0.413	9.5	10.5
B	0.327	0.342	8.3	8.7
C	0.524	0.539	13.3	13.7
D	0.592	0.628	15.0	16.0
E	0.335	0.358	8.5	9.1
F	0.374	0.398	9.5	10.1
G	0.094	0.118	2.4	3.0
H	0.020	0.028	0.5	0.7
J	0.106	0.146	2.7	3.7
K	0.075	0.083	1.9	2.1
L	0.185	0.201	4.7	5.1