


# SOD1H1 THRU SOD1H8

## SURFACE MOUNT HIGH EFFICIENCY RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 1.0 Ampere

### SOD-123FL

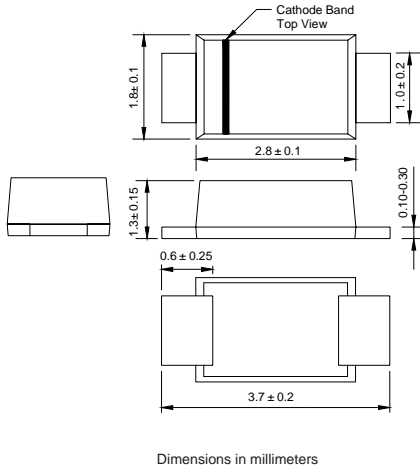

### FEATURES

- ◆ Glass passivated device
- ◆ Ideal for surface mounted applications
- ◆ Low reverse leakage
- ◆ Metallurgically bonded construction
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC SOD-123FL molded plastic body over passivated chip  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.0007 ounce, 0.02 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


MDD Catalog Number	SYMBOLS	SOD1H1 U1	SOD1H2 U2	SOD1H3 U3	SOD1H4 U4	SOD1H5 U5	SOD1H6 U6	SOD1H7 U7	SOD1H8 U8	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	VOLTS
Maximum average forward rectified current	$I_{(AV)}$	1.0								Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	25.0								Amps
Maximum instantaneous forward voltage at 1.0A	$V_F$	1.0		1.3		1.7				Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$	5.0 100.0								$\mu\text{A}$
Maximum reverse recovery time (NOTE 1)	$t_{rr}$	50						75		ns
Typical thermal resistance	$R_{\theta JA}$	180								K/W
Operating junction and storage temperature range	$T_J, T_{STG}$	-50 to +150								$^\circ\text{C}$

**Note:** 1. Measured with  $I_F=0.5A$ ,  $I_R=1A$ ,  $I_{rr}=0.25A$ .

# RATINGS AND CHARACTERISTIC CURVES SOD1H1 THRU SOD1H8


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

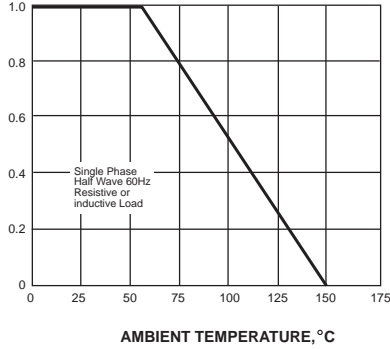


PEAK FORWARD SURGE CURRENT,  
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

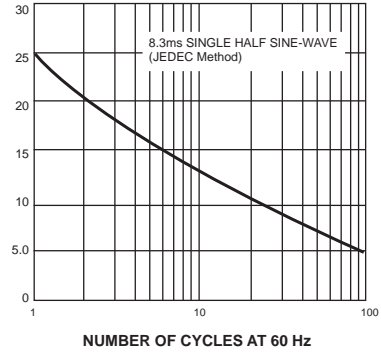

INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

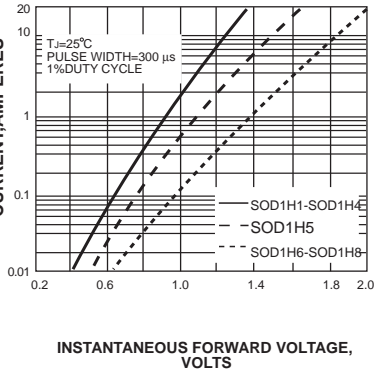

INSTANTANEOUS REVERSE CURRENT, MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

