



# UP1753

## NPN SILICON TRANSISTOR


### HIGH CURRENT LOW $V_{CE(SAT)}$ TRANSISTOR

■ DESCRIPTION

The UTC **UP1753** is specially designed to have high current and low  $V_{CE(SAT)}$  to suit for power amplifier application and power switching application.

■ FEATURES

- \* $V_{CE(SAT)}$  typ is below 300mV at 5A
- \* Max continuous current 6 A
- \*  $BV_{CEO}$  is 100V minimum

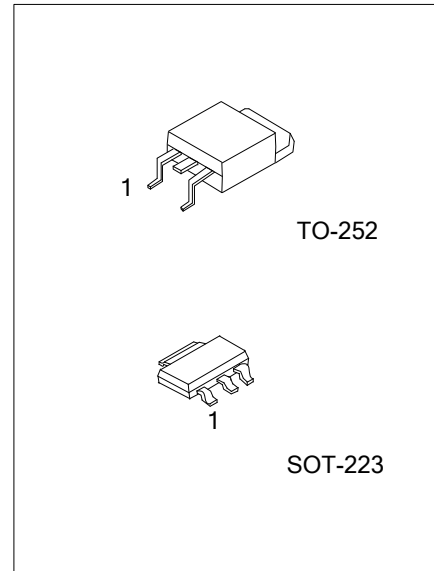

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UP1753L-AA3-R	UP1753G-AA3-R	SOT-223	B	C	E	Tape Reel
UP1753L-TN3-T	UP1753G-TN3-T	TO-252	B	C	E	Tube
UP1753L-TN3-R	UP1753G-TN3-R	TO-252	B	C	E	Tape Reel

<p>UP1753L-AA3-T</p> <p>(1) Packing Type (2) Package Type (3) Lead Free</p>	<p>(1) T: Tube, R: Tape Reel (2) AA3: SOT-223, TN3: TO-252 (3) L: Lead Free, G: Halogen Free</p>
---	--

■ MARKING INFORMATION

PACKAGE	MARKING
SOT-223	<p>UP1753 □ □ □          L: Lead Free          G: Halogen Free          Data Code</p> <p>1</p>
TO-252	<p>UTC          UP1753 □ □ □ □          Lot Code ← Data Code          L: Lead Free          G: Halogen Free          Data Code</p> <p>1</p>

### ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	$V_{CBO}$	200	V
Collector-Emitter Voltage	$V_{CEO}$	100	V
Emitter-Base Voltage	$V_{EBO}$	6	V
Peak Pulse Current	$I_{CM}$	10	A
Continuous Collector Current	$I_C$	6	A
Power Dissipation ( $T_A = 25^\circ\text{C}$ )	SOT-223	0.8	W
	TO-252	1	W
Junction Temperature	$T_J$	+150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$






Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	$BV_{CBO}$	$I_C = 100\mu\text{A}$	200	300		V
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	$I_C = 10\text{mA}$ (Note1)	100	120		V
Emitter-Base Breakdown Voltage	$BV_{EBO}$	$I_E = 100\mu\text{A}$	6	8		V
Collector Cut-Off Current	$I_{CBO}$	$V_{CB} = 150\text{V}$			10	nA
Collector Cut-Off Current	$I_{CER}$	$V_{CE} = 150\text{V}$ , $R_s \leq 1\text{K}\Omega$			10	nA
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB} = 6\text{V}$			10	nA
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = 0.1\text{A}$ , $I_B = 5\text{mA}$ (Note1)			50	mV
		$I_C = 2\text{A}$ , $I_B = 100\text{mA}$ (Note1)			150	
		$I_C = 5\text{A}$ , $I_B = 500\text{mA}$ (Note1)			330	
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C = 5\text{A}$ , $I_B = 500\text{mA}$ (Note1)			1250	mV
Base-Emitter Turn-On Voltage	$V_{BE(ON)}$	$I_C = 5\text{A}$ , $V_{CE} = 2\text{V}$ (Note1)			1100	mV
Static Forward Current Transfer Ratio	$h_{FE}$	$I_C = 10\text{mA}$ , $V_{CE} = 2\text{V}$	100	200		
		$I_C = 2\text{A}$ , $V_{CE} = 2\text{V}$ (Note1)	100	200	300	
		$I_C = 4\text{A}$ , $V_{CE} = 2\text{V}$ (Note1)	50	100		
		$I_C = 10\text{A}$ , $V_{CE} = 2\text{V}$ (Note1)	20			
Transition Frequency	$f_T$	$I_C = 100\text{mA}$ , $V_{CE} = 10\text{V}$ $f = 50\text{MHz}$		100		MHz
Output Capacitance	$C_{OB}$	$V_{CB} = 10\text{V}$ , $f = 1\text{MHz}$		38		pF
Switching Times	$t_{ON}$	$I_C = 1\text{A}$ , $V_{CC} = 10\text{V}$		50		ns
	$t_{OFF}$	$I_{B1} = I_{B2} = 100\text{mA}$		1600		ns

Note: 1. Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$ .

### TYPICAL CHARACTERISTICS

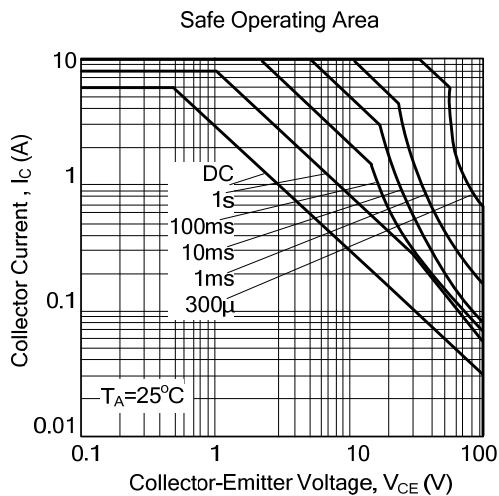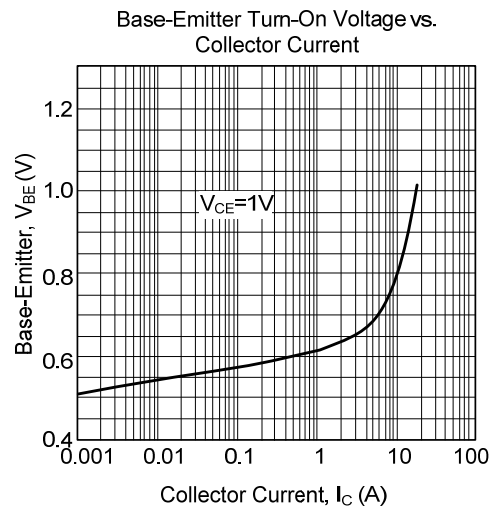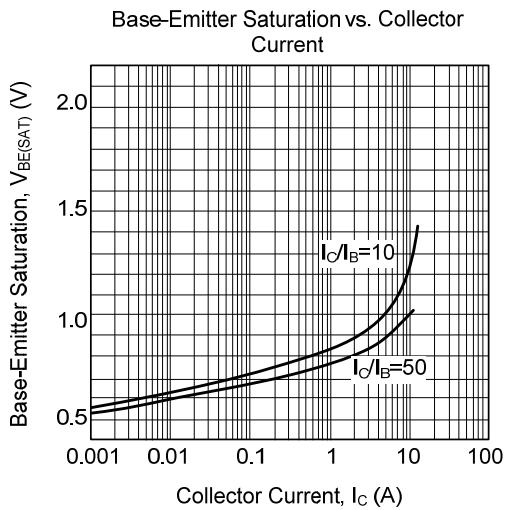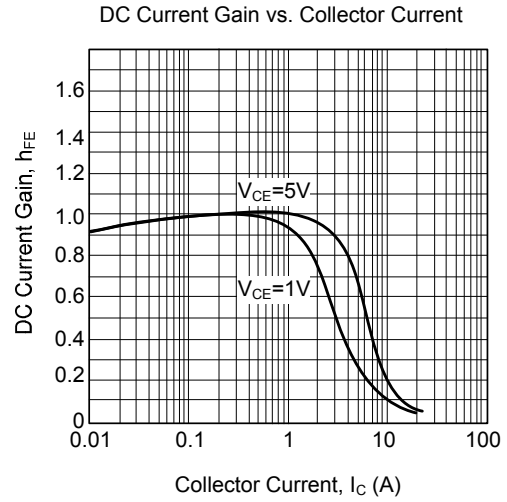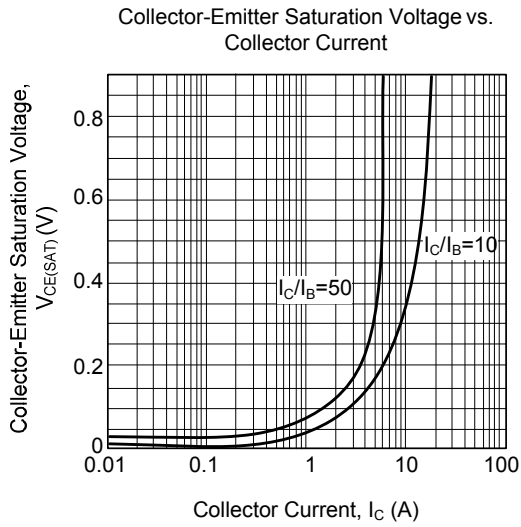

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.