


XX Type

3.2×2.5×0.7mm typ.

Tight Tolerance 10ppm

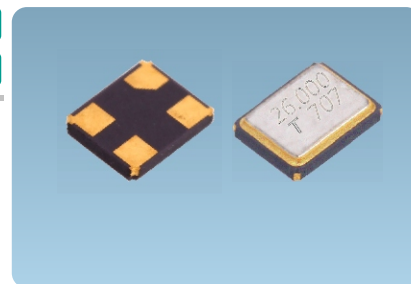

Feature


A small surface mount type crystal unit, especially suited for small-sizing requirements.

- Ultra compact and thin. (3.2×2.5×0.7 mm typ.)
- Tight Tolerance 10ppm available.
- Application : Bluetooth ; Mobile phone ; W-LAN ; Office Automation ; Audio & Visual.
- Meets the requirements for re-flow profiling using lead-free solder.

Specifications

Item	Type				
	XX-Type				
Frequency Range	8~12MHz	12~16MHz	16~20MHz	20~30MHz	30~60MHz
Oscillator Mode	Fundamental				
Load Capacitance	Series,8pF,10pF,12pF				
Drive Level	10μW(100μW max.)				
Frequency Tolerance	±10×10 ⁻⁶ ,±20×10 ⁻⁶ ,±30×10 ⁻⁶ ,±50×10 ⁻⁶ (at 25°C)				
Series Resistance	100Ω max.	80Ω max.	50Ω max.	40Ω max.	30Ω max.
Operating Temperature Range	-10~+60°C, -20~+70°C, -40~+85°C				
Storage Temperature Range	-40~+85°C				
Packing Unit	3000pcs./reel(Ø180)				

Outline Drawing

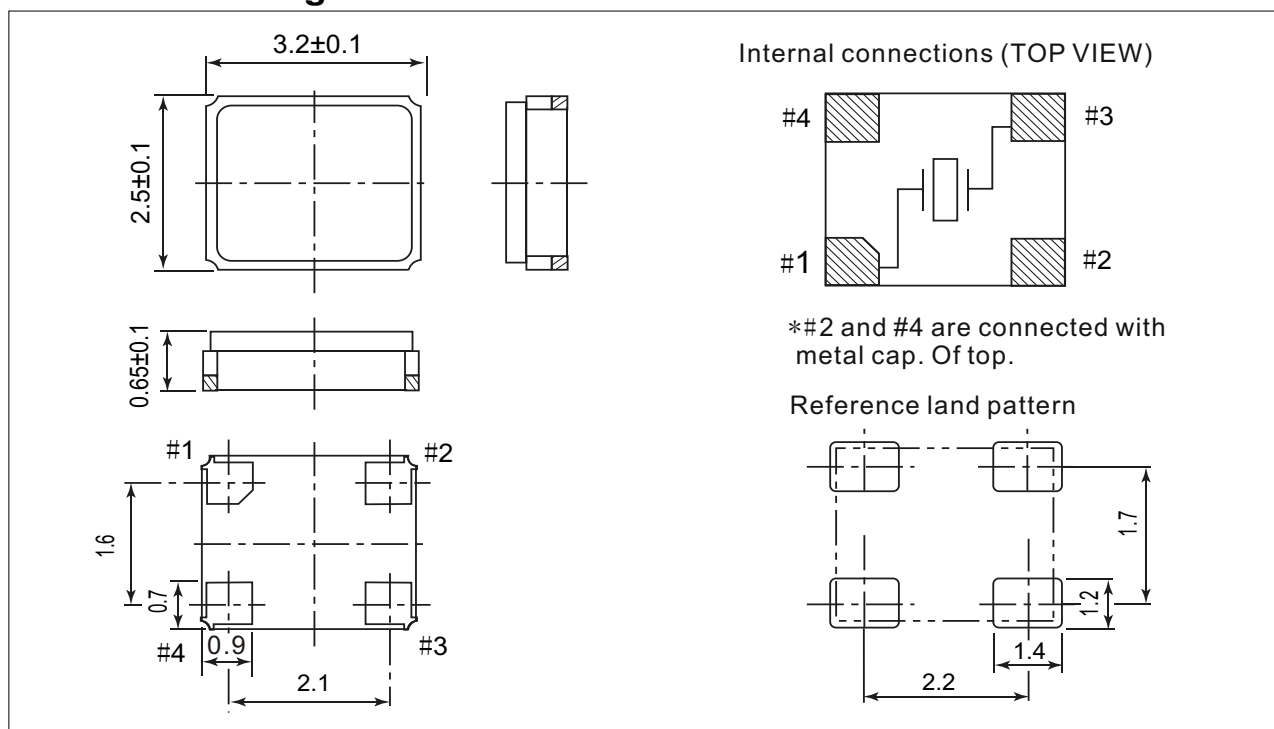


Frequency Stability Vs. Temperature Range

Temp.(°C)	Ppm	±5	±10	±15
-10 ~ +60		✓	✓	✓
-20 ~ +70		+	✓	✓
-40 ~ +85		×	+	✓

✓Standard +Available(case by case) × Not Available

Oscillation Circuit of Fundamental Mode

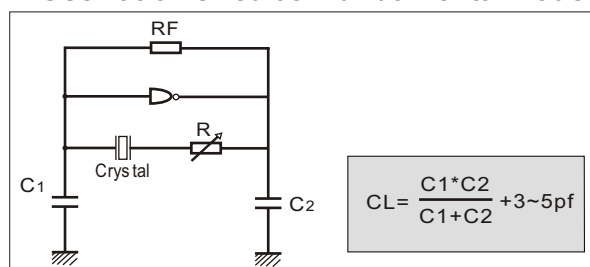

Q.C
PASS

T1106A